



TECHNICAL  
SPECIFICATIONS

Product Code	PMM2/M3-HI18-SCH
Dimension (mm) W x L x H	50x50x5
Material	PMMA
Fastening	Screw
Beam Angle	146° - 54° Medium, Type II
Type	8 in 1
Optical Efficiency	%93
Rohs Complaint	Yes


MATERIALS

PMMA clear, Non-yellowing for 10 years.  
Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:  
-YI 6 under hot/dry conditions  
-YI 8 under hot/wet conditions


INSTRUCTIONS FOR USE &  
MAINTENANCE

Working Temperature : -40° C ~ +100° C  
Storage Temperature : -40° C ~ +100° C  
Please handle or install lenses with wearing gloves.  
Skin oils may damage lens or its optical characteristic.  
Never use any commercial cleaning solvents on lenses , like alcohol.  
If necessary, clean lenses wiht mild soap, water and soft cloth.


SAMSUNG LH351B

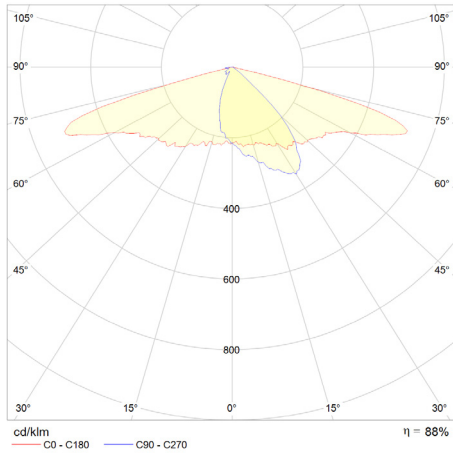


CREE XPG3

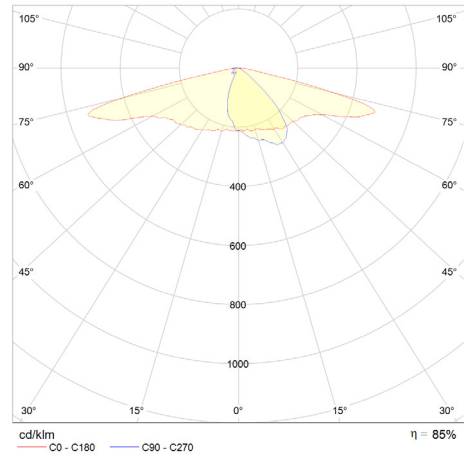


NICHIA NVSW219D

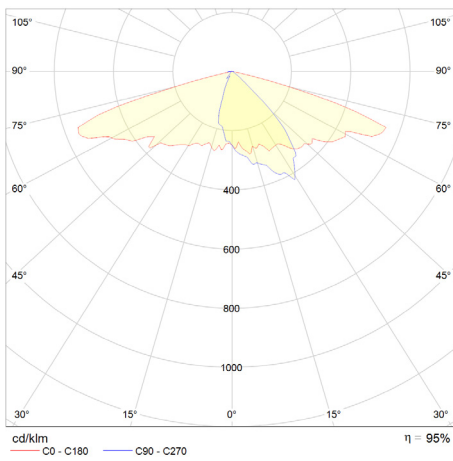


OSRAM OSLON SQUARE

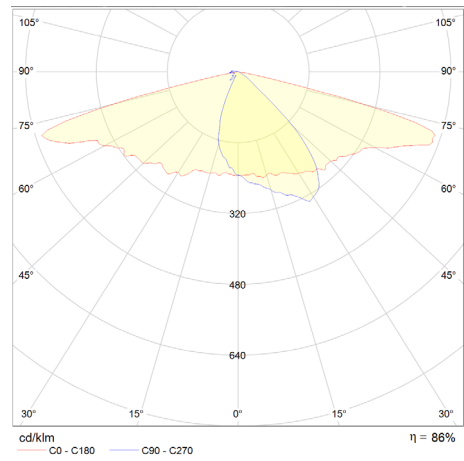




CREE XTE

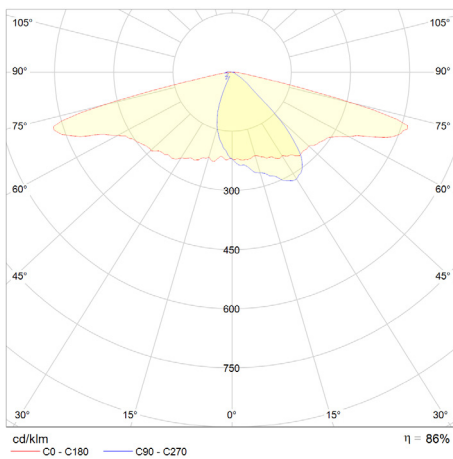

NICHIA NF2W 757 GR

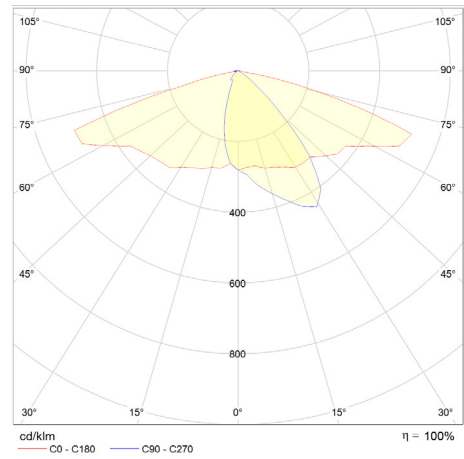

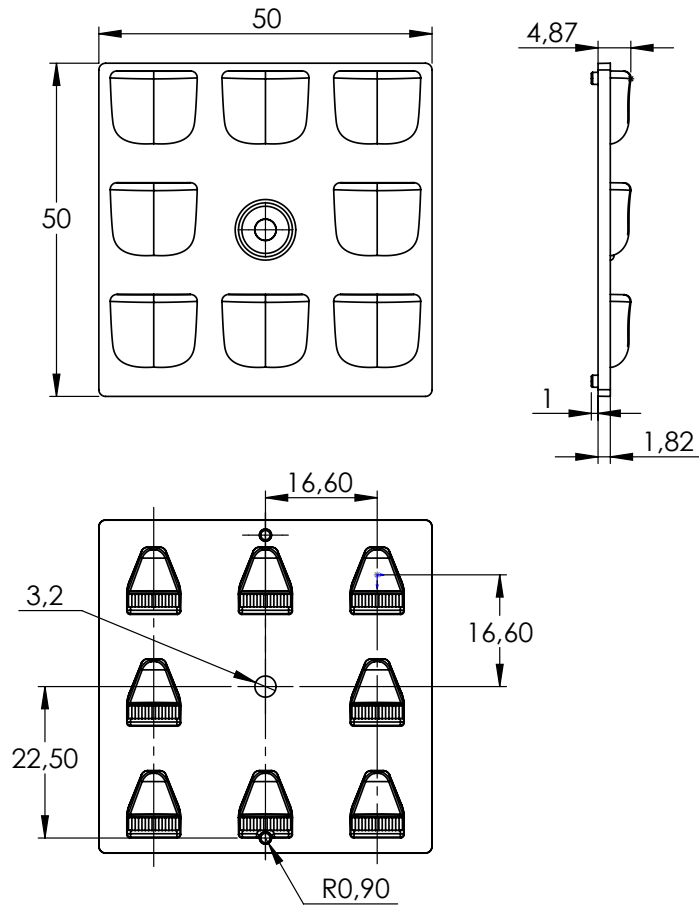

	UNIT mm	PART NO: PMM2/3HI18-SCH	 GENERAL TOLERANCES ± 0,2 MM		
	MATERIAL	PMMA	REV.	REVISION	REV. DATE
	WEIGHT	6,74 g	1		
	DATE	22.06.2020	2		
			3		
		PAGE 1 / 1	FORM	A4	SCALE 1:1

Box Size (mm) W x L x H	370x300x225
Box Weight	7,5 Kg
Box Quantity	900 pcs

