

TECHNICAL  
SPECIFICATIONS

Product Code	PMM2/M3-MI44-SCH
Dimension (mm) W x L x H	50x50x4,2
Material	PMMA
Fastening	Screw
Beam Angle	Medium, Type II
Type	16 in 1
Optical Efficiency	%93
Rohs Complaint	Yes


MATERIALS

PMMA clear, Non-yellowing for 10 years.  
Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:  
-YI 6 under hot/dry conditions  
-YI 8 under hot/wet conditions


INSTRUCTIONS FOR USE &  
MAINTENANCE

Working Temperature : -40° C ~ +100° C  
Storage Temperature : -40° C ~ +100° C  
Please handle or install lenses with wearing gloves.  
Skin oils may damage lens or its optical characteristic.  
Never use any commercial cleaning solvents on lenses , like alcohol.  
If necessary, clean lenses wiht mild soap, water and soft cloth.


OSRAM DURIS S5

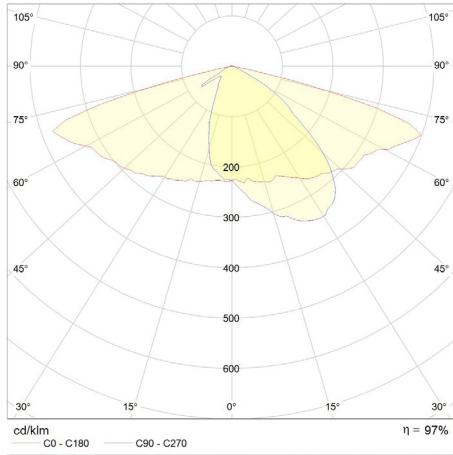


LUXEON 3030 2D

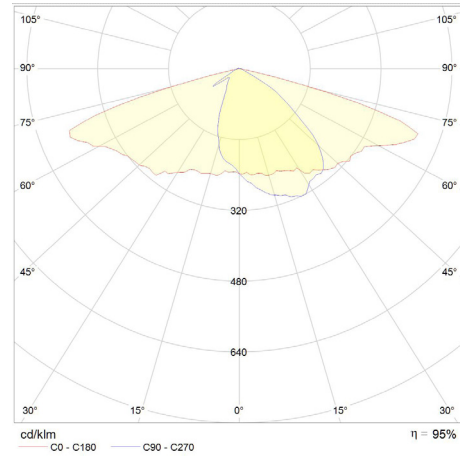


SEOUL MJT 3030

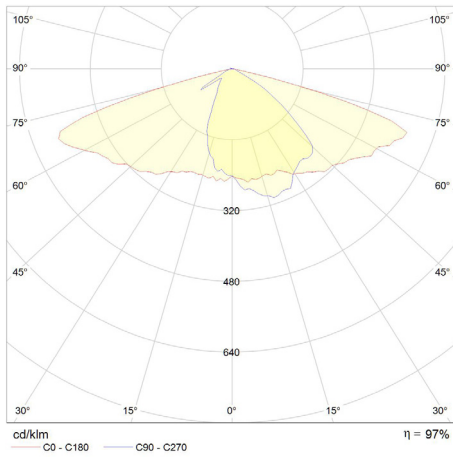


NICHIA NF2W 757 GR

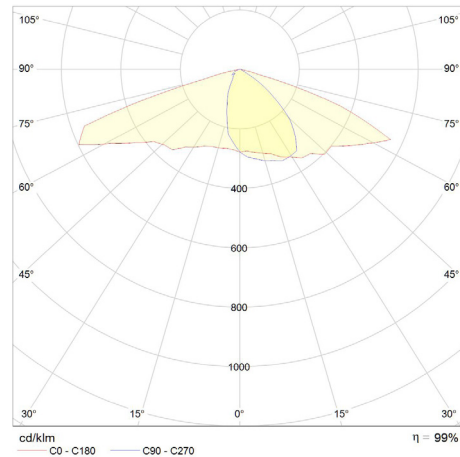




CREE J SERIES

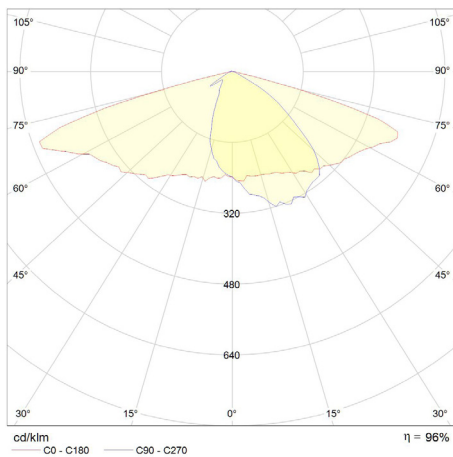

SAMSUNG LM302Z+

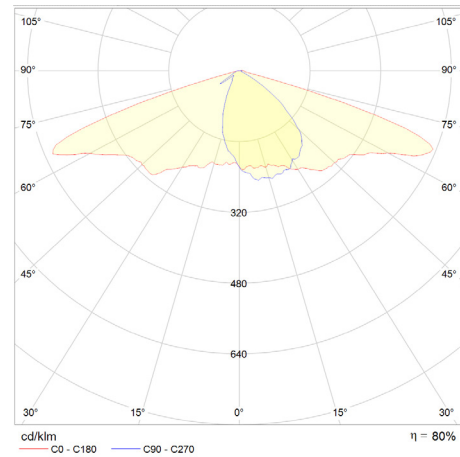

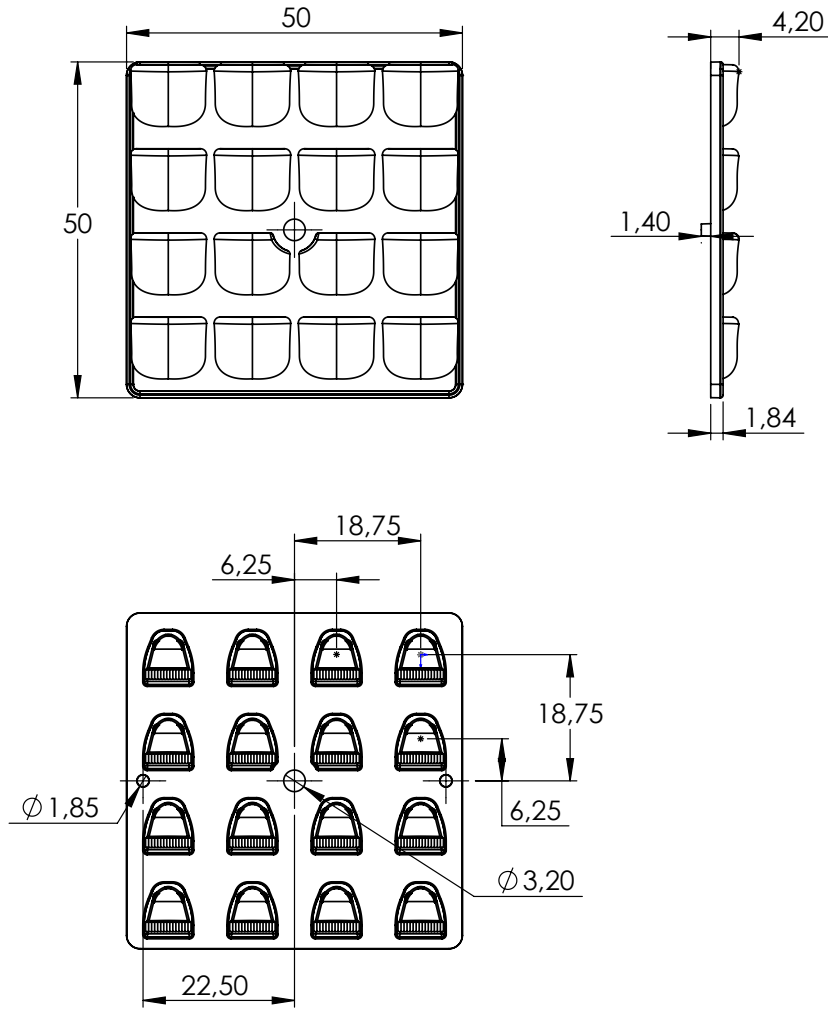

	UNIT mm	PART NO: PMM2/M3-MI44-SCH	 GENERAL TOLERANCES ± 0,2 MM	
	MATERIAL	PMMA	REV.	REVISION
	WEIGHT	6,44 g	1	
	DATE	22.06.2020	2	
			3	
		PAGE 1 / 1	FORM A4	SCALE 1:1

Box Size (mm) W x L x H	370x300x225
Box Weight	7,7 Kg
Box Quantity	960 pcs

