



TECHNICAL  
SPECIFICATIONS

Product Code	PMM2/M3-HI26-SCIP
Dimension (mm) W x L x H	173x72x8,24
Material	PMMA
Fastening	Screw
Beam Angle	Medium, Type II
Type	12 in 1
Optical Efficiency	%93
Rohs Complaint	Yes


MATERIALS

PMMA clear, Non-yellowing for 10 years.  
Yellowness Index (YI) according to the test standarts for Arizona/Florida outdoor exposure testing:  
-YI 6 under hot/dry conditions  
-YI 8 under hot/wet conditions


INSTRUCTIONS FOR USE &  
MAINTENANCE

Working Temperature : -40° C ~ +100° C  
Storage Temperature : -40° C ~ +100° C  
Please handle or install lenses with wearing gloves.  
Skin oils may damage lens or its optical characteristic.  
Never use any commercial cleaning solvents on lenses , like alcohol.  
If necessary, clean lenses wiht mild soap, water and soft cloth.


SAMSUNG LH351B

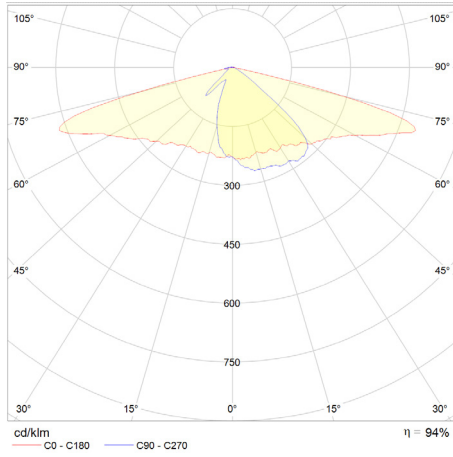


CREE XPG3

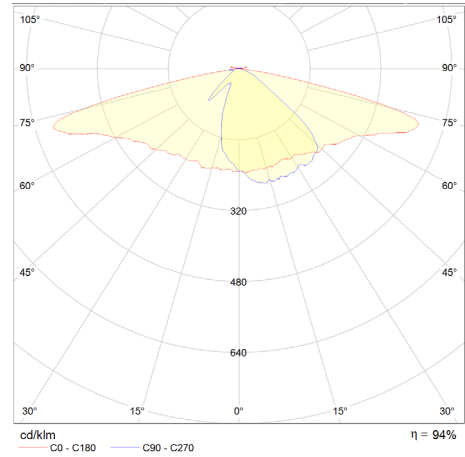


NICHIA NVSW219D

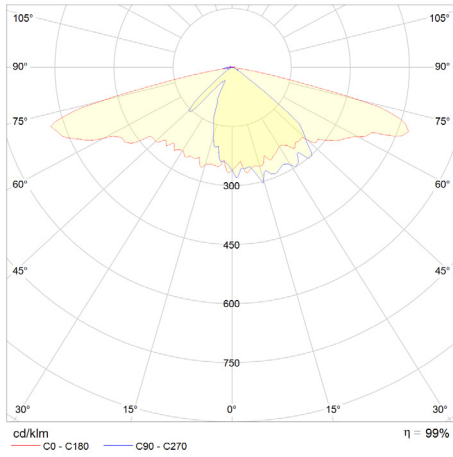


OSRAM OSLON SQUARE


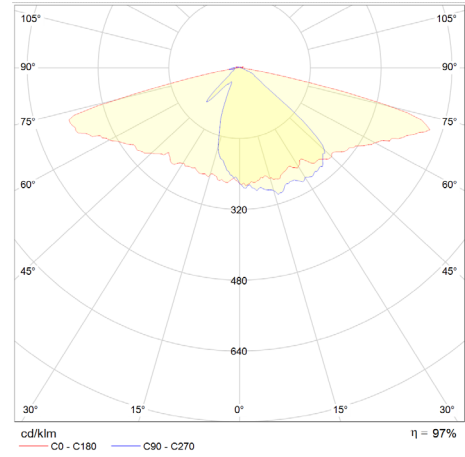




CREE XTE

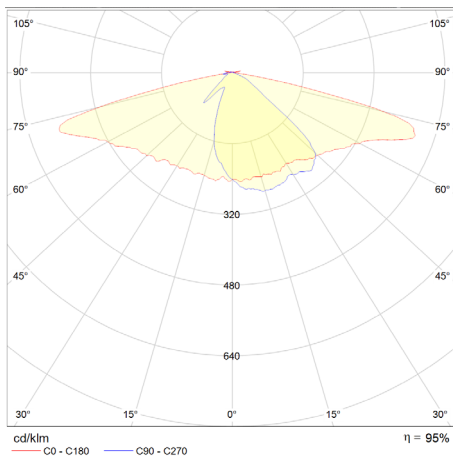

SEOUL Z5-M3

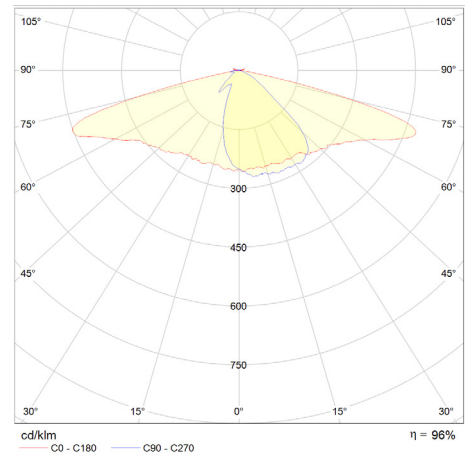

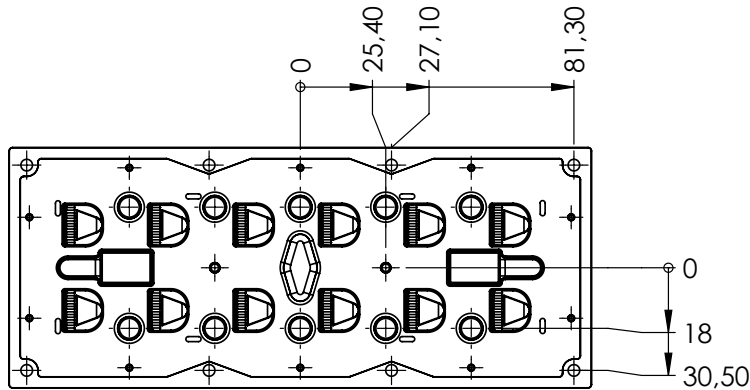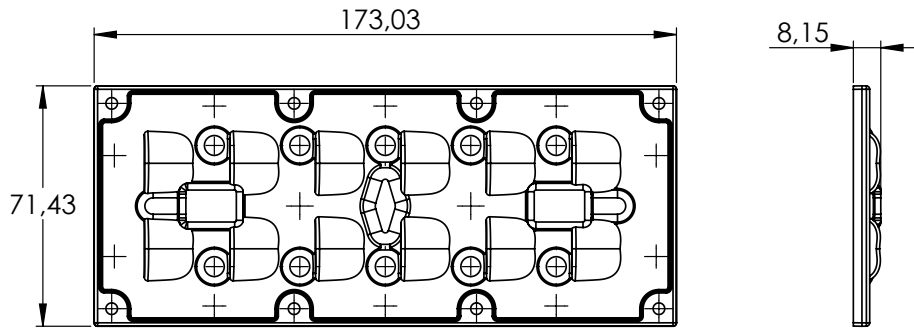

	UNIT mm	PART NO: PMM2/M3-HI26-SCIP	 GENERAL TOLERANCES ± 0,2 MM	
	MATERIAL	PMMA	REV.	REVISION
	WEIGHT	47 g	1	
	DATE	04.09.2020	2	
			3	
			FORM	A4
			SCALE	1:2
			PAGE	1 / 1

Box Size (mm) W x L x H	570x190x160
Box Weight	7,5 Kg
Box Quantity	150 pcs

